



# SW User Guide

1VV0301283, Rev. 04 – 2016-05-24

**TELIT**  
**TECHNICAL**  
**DOCUMENTATION**



BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

# BlueEva+S

## Evaluation Kit User Guide

4000.0004-00

Release r04

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

**Table of Contents**

1	Introduction .....	5
2	Package Content.....	5
3	Version Information .....	5
3.1	Version V1.0 .....	5
3.2	Version V2.0 .....	6
3.3	Differences.....	6
4	Hardware.....	7
4.1	BlueMod+S .....	7
4.2	Reset .....	7
4.3	USB Interface .....	7
4.4	LEDs.....	8
4.5	External Low Power Oscillator .....	8
4.6	Connectors / Jumpers.....	8
4.6.1	Jumper J2 .....	8
4.6.2	Jumper J3 .....	8
4.6.3	Jumper J4 .....	9
4.6.4	Connector X3 .....	10
4.6.5	Connector X4 .....	11
4.7	Current Measurement .....	11
4.8	Power Supply.....	11
4.8.1	USB Power Supply.....	11
4.8.2	External Power Supply .....	11
4.8.3	Battery Holder .....	11
4.9	Buzzer .....	12
4.10	Push Button .....	12
4.11	How To Interface the UART Lines on TTL level .....	12
4.12	Default Configuration .....	14
5	Setup.....	15

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

5.1	System Requirements.....	15
5.2	Startup .....	15
5.3	Installation of the BlueEva+S USB Driver.....	15
6	Usage of the BlueEva+S .....	16
6.1	Configuration of the BlueEva+S .....	16
6.2	Connection with Telit “Terminal IO Utility” App .....	17
7	Firmware Update.....	24
8	History .....	28

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

## 1 Introduction

This documentation describes the usage of the evaluation board for the Telit Bluetooth module BlueMod+S.

The evaluation board is not a finished product and is intended for development and evaluation purposes in a laboratory environment only.

## 2 Package Content

The BlueEva+S package contains the following components:

- 1 x BlueEva+S board
- 1 x USB cable
- 1 x Battery CR2032
- 1 x Printed card with download instructions

## 3 Version Information

### 3.1 Version V1.0

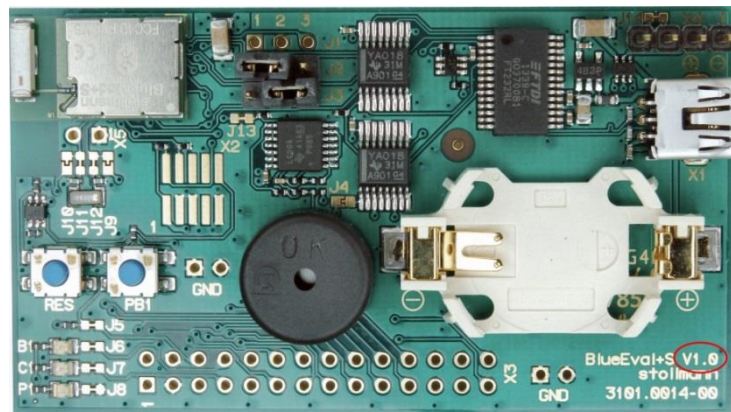


Figure 1: BlueEva+S Version 1.0

## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

### 3.2 Version V2.0

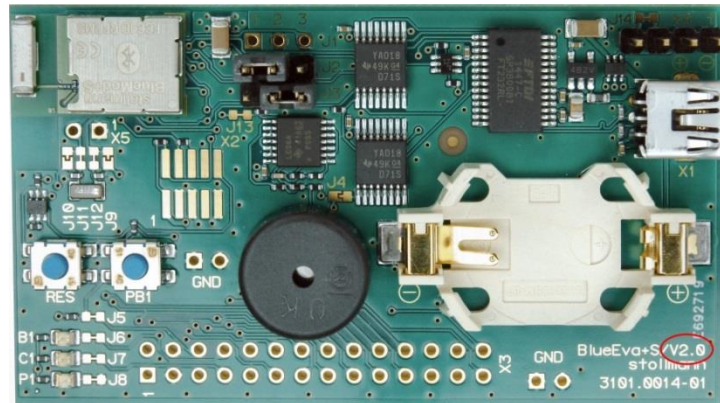


Figure 2: BlueEva+S Version 2.0

### 3.3 Differences

The BlueEva+S version can be identified by the board version identifier as indicated in Figure1 + 2.

Item	Version 1.0	Version 2.0
Connector X3	Connected to BlueMod+S module only when jumper J4 is closed	Permanently connected to BlueMod+S module
Battery operation	Battery current $\leq 2\text{mA}$ <sup>(1)</sup>	Battery current $\leq 10\mu\text{A}$ <sup>(1)</sup>

<sup>(1)</sup> LED P1 disabled (J8 = open), UICP = ON, USB not connected, UART not connected

## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

### 4 Hardware

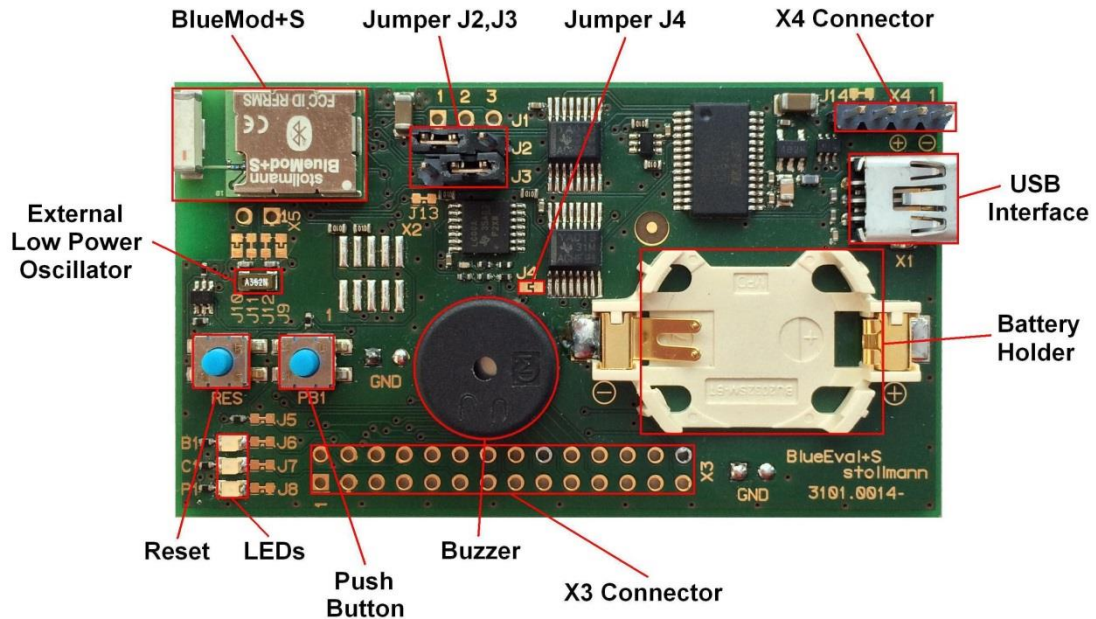


Figure 3: BlueEva+S

#### 4.1 BlueMod+S

The BlueEva+S is equipped with a BlueMod+S Bluetooth module.

#### 4.2 Reset

The BlueEva+S is equipped with a reset button. Pressing the reset button will trigger the BlueMod+S module to perform a reset. The USB port is not influenced by the reset.

#### 4.3 USB Interface

The BlueEva+S provides an USB interface which is used to connect the evaluation board to the host and as power supply.

The USB interface is equipped with an FTDI USB to serial bridge, interfacing the serial port of the BlueMod+S.

## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

The serial port is a high-speed UART interface at CMOS levels and supports the following features:

- Transmission speed: 9,600 – 921,600 bps (asynchronous)
- Character representation: 8 bit, no parity, 1 stop bit (8N1)
- Hardware flow-control with RTS/CTS (active low)

For details please refer to the *BlueMod+S Hardware Reference*.

### 4.4 LEDs

The BlueEva+S provides several LEDs for functional indication.

Interface	Position	Function
LEDs	P1	Indicates the presence of power supply voltage
	B1	Connected to GPIO[3] <sup>(1)</sup>
	C1	Connected to GPIO[2] <sup>(1)</sup>

<sup>(1)</sup> Function depending on firmware support

### 4.5 External Low Power Oscillator

The BlueEva+S provides an external low power crystal. This is connected to the BlueMod+S by default. For using alternatively low power oscillator sources refer to the schematics and the *BlueMod+S Hardware Reference*.

### 4.6 Connectors / Jumpers

#### 4.6.1 Jumper J2

Jumper J2 provides the possibility to invoke the bootloader at start-up. This is required for firmware update.

Jumper Number	Position	Function
J2	1-2	Normal operation mode at start-up
J2	2-3	Invoke bootloader at start-up (BOOT0)

#### 4.6.2 Jumper J3

Jumper J3 is used for either hangup or UICP functionality.



BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

In hangup mode DTR# is connected to GPIO[4]. An existing connection is terminated by DTR drop (high signal on DTR#).

In UICP mode DTR# is used as IUR-IN# signal. UICP is an advanced power management protocol. For further information about UICP please refer to the *UICP UART Interface Control Protocol Specification*.

Jumper Number	Position	Function
J3	1-2	DTR# connected to IUR-IN# for using UICP
J3	2-3	DTR# connected to GPIO[4]

#### 4.6.3 Jumper J4

Jumper J4 provides the possibility to disable (by closing it with a soldering point) the USB to serial bridge. With a closed jumper J4, the in- and outputs of the FTDI chip are disconnected. Therefore the modules serial port can be controlled via Connector X3 (see chapter 4.11).

When using BlueEva+S V2.0, be sure to connect a serial interface via connector X3 only when jumper J4 is closed. Otherwise the serial interface and the USB to serial bridge will collide.

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

#### 4.6.4 Connector X3

Connector X3 is a 28 pin extension header exposing all module signals.

Pin Number	Signal	Type	Description
1	+3V0	PWR	Supply voltage output
2	+3V0	PWR	Supply voltage output
3	GND	PWR	Ground
4	GND	PWR	Ground
5	GPIO[0]	I	GPIO
6	GPIO[1]	I	GPIO
7	GPIO[2]	I/O	LED C1, user IO
8	GPIO[3]	I/O	LED B1, user IO
9	GPIO[4]	I-PD	HANGUP
10	GPIO[5]	I/O	IOD, user IO
11	GPIO[6]	I-DIS	GPIO
12	GPIO[7]	I-DIS	GPIO
13	GPIO[8]	I/O	IOA, user IO
14	GPIO[9]	I-DIS	Leave open <sup>(1)</sup>
15	GPIO[10]	I-DIS	Leave open <sup>(1)</sup>
16	GPIO[11]	I-DIS	Leave open <sup>(1)</sup>
17	GPIO[12]	I-DIS	Leave open <sup>(1)</sup>
18	GPIO[13]	I-DIS	Leave open <sup>(1)</sup>
19	GPIO[14]	I-DIS	Leave open <sup>(1)</sup>
20	PO26_AIN0		See schematic <sup>(1)</sup>
21	PO27_AIN1		See schematic <sup>(1)</sup>
22	EXT-RES#	I-PU	User reset
23	UART-TXD <sup>(2)</sup>	O-PP	IUR data OUT
24	UART-RXD <sup>(2)</sup>	I	IUR data IN
25	UART-CTS# <sup>(2)</sup>	I	Flow control / IUC
26	UART-RTS# <sup>(2)</sup>	O-PP	Flow control / IUC
27	IUR-IN# <sup>(2)</sup>	I	UICP control
28	IUR-OUT# <sup>(2)</sup>	O-PP	UICP control

PU = PullUp, PD = PullDown, PP = PushPull, I-DIS = InputBufferDisconnected

<sup>(1)</sup> Function depending on firmware support

<sup>(2)</sup> BlueEva+S V1.0: Disconnected from module, when jumper J4 is open

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

#### 4.6.5 Connector X4

Connector X4 provides the possibility to measure the supply current of the BlueMod+S and to power the evaluation board with an external power supply.

Pin Number	Signal
1	GND
2	ext. PWR
3	+3V0
4	+3V0-BT

#### 4.7 Current Measurement

Current measurement can be performed by opening (cut off) jumper J14 and measuring the current drawn by BlueMod+S between pin 3 and 4 of connector X4. The currents drawn by other peripherals on BlueEva+S are not included in this measurement.

For measuring the minimum current, the serial interface must be disconnected from the module. This can be achieved by disconnecting the USB plug and powering the board via external or battery supply or by closing solder jumper J4.

#### 4.8 Power Supply

The three power sources are decoupled from each other by diodes connected in series. The presence of the supply voltage is indicated by LED P1.

##### 4.8.1 USB Power Supply

V<sub>BUS</sub> of the USB connector X1 directly powers the USB to serial converter and via a voltage regulator the rest of the circuitry.

##### 4.8.2 External Power Supply

Pin 1 and 2 of connector X4 provides the possibility to connect an external power supply (see *BlueMod+S Hardware Reference*).

##### 4.8.3 Battery Holder

The battery holder provides the possibility to run the BlueEva+S without external power (via USB or external power supply) by using a 3V coin cell battery CR2032. Opening jumper J8 will disconnect the power LED P1 and thus save 1.8mA of battery current. For safety reasons there should be permanently connected no other power supply, when a battery is inserted.

## **4.9 Buzzer**

The Buzzer can be used to generate alarm and other audible signals.

## **4.10 Push Button**

The Push Button can be used as input for human interaction.

## **4.11 How To Interface the UART Lines on TTL level**

**If you want to access the UART lines directly it is important to disable the onboard USB to serial bridge by closing jumper J4 with a soldering point.**

All UART signals are available at connector X3 and can be connected to your application.

# BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

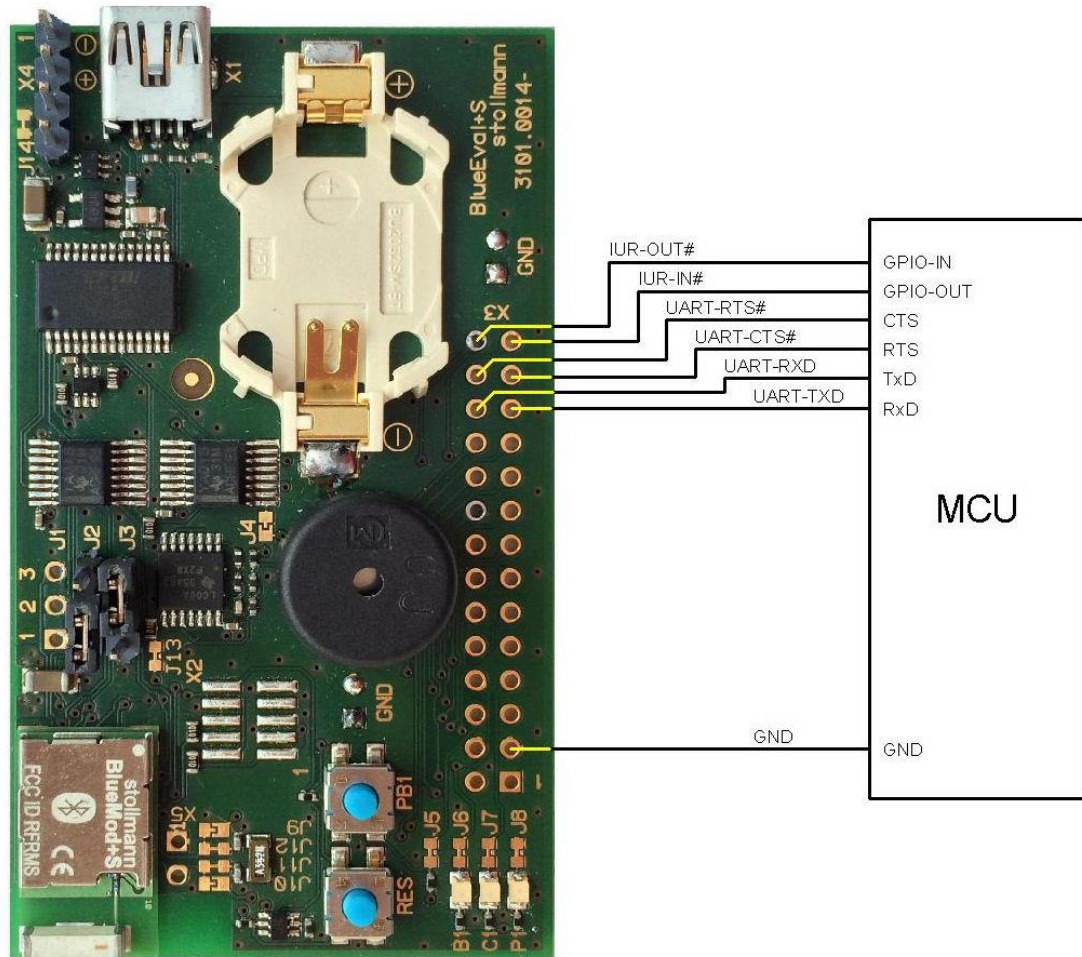


Figure 4: MCU connected to UART lines

## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

### 4.12 Default Configuration

The BlueEva+S is preconfigured as described below:

Jumper Number	Position	Function
J2	1-2	Normal operation mode at start-up
J3	2-3	DTR# connected to GPIO[4] (Hangup Mode)

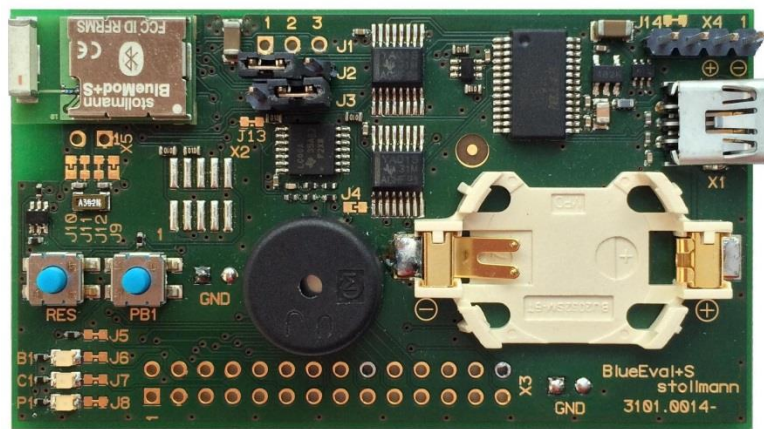


Figure 5: BlueEva+S default configuration

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

## 5 Setup

### 5.1 System Requirements

- PC with Windows® XP or higher
- 1 free USB port
- Adobe Acrobat® Reader for reading the documentation

### 5.2 Startup

To install the BlueEva+S connect it as follows.



Figure 6: BlueEva+S as delivered

### 5.3 Installation of the BlueEva+S USB Driver

If required download the latest FTDI VCP USB to UART driver from:

<http://www.ftdichip.com/Drivers/VCP.htm>

Connect the BlueEva+S to a free USB port of a PC and install the USB device drivers by following the instructions of the Windows® Hardware Wizard using the downloaded FTDI VCP USB to UART driver.

The USB connection is used for power supply and for UART communication to a PC over a virtual COM port. This lets you use a terminal emulation program to perform the configuration or to control the Bluetooth connection.

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

You may download the TeraTerm terminal program from our web site:

<http://www.stollmann.de/en/support/downloads/tools.html>

## 6 Usage of the BlueEva+S

### 6.1 Configuration of the BlueEva+S

If the BlueEva+S is correctly connected to the PC, a terminal emulation program can be used to read and modify the configuration settings.

For a more detailed description of the AT commands used for this purpose, please consult our *BlueMod+S AT Command Reference*.

As shipped by the factory, the BlueEva+S works at 115,200 bps, using the 8N1 data format (8 data bits, no parity, 1 stop bit). Please configure your terminal emulation program accordingly. Select the COM port the BlueEva+S is connected to (COM22 in the example below).

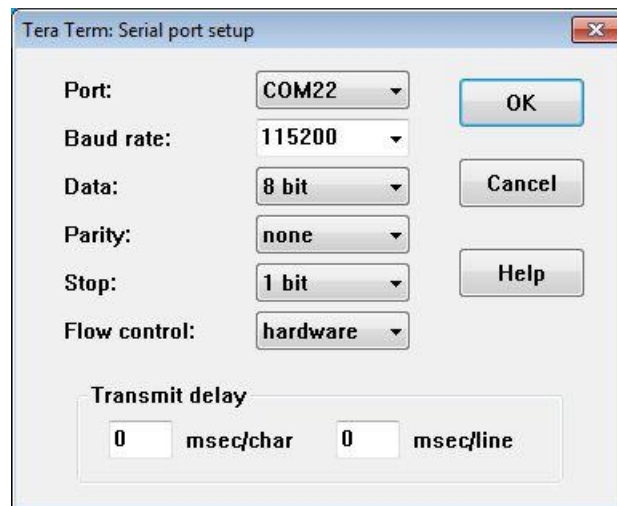


Figure 7: COM port configuration with TeraTerm

Once you have successfully configured the terminal emulation program, issuing the “AT” command without parameters should prompt the BlueEva+S to return OK.

Now you can readout information about the type of the connected device using the “ATI” command.

In the next step, you should issue the “ATI99” command to determine the firmware version installed and check to see whether that is the most recent version.



## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

Finally, you should use the “AT+BOAD” command to determine the Bluetooth address of the BlueEva+S. The Bluetooth address is unique, letting you identify the correct device for each Bluetooth address.

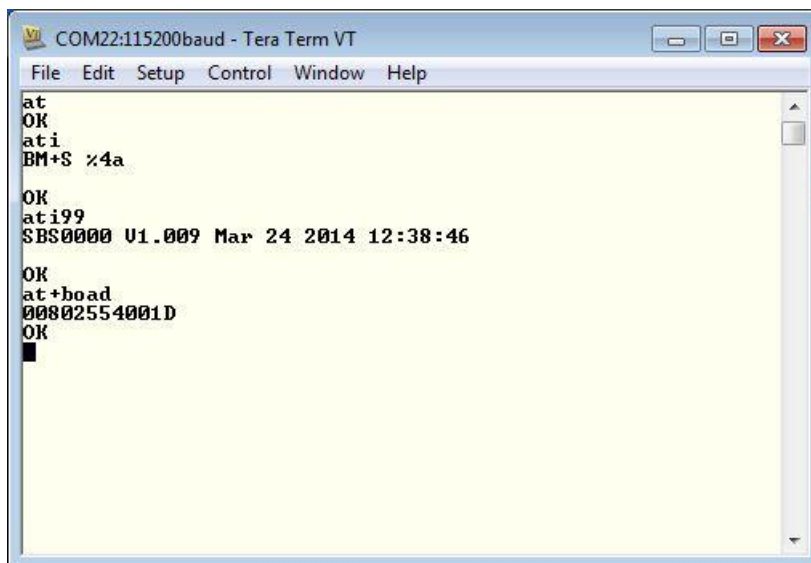


Figure 8: Reading some BlueEva+S settings with TeraTerm

### 6.2 Connection with Telit “Terminal IO Utility” App

Telit provides the "Terminal IO Utility" App for iPhone which can be used to establish a Bluetooth Low Energy connection from the iPhone to the BlueEva+S.

The following QR-Code provides the link to download the "Terminal IO Utility".



The “Terminal IO Utility” App allows the user to connect to Terminal I/O peripheral devices and exchange data providing a simple terminal emulation.





BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.


Please find an example below:
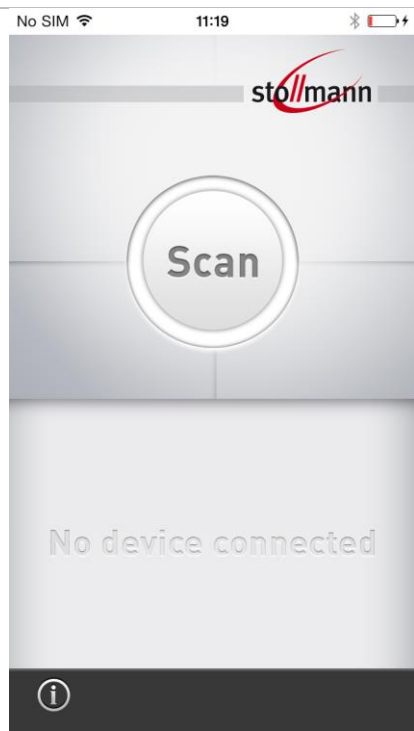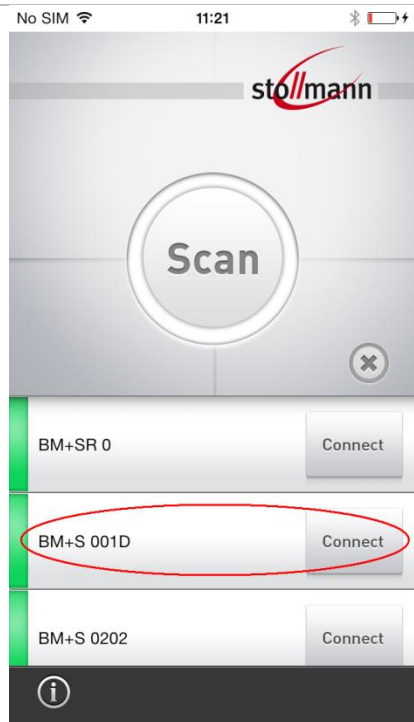
<p>Press the “Scan” button to search for available Terminal I/O peripheral devices.</p>	 <p>The screenshot shows the Stollmann app interface. At the top, there's a status bar with 'No SIM', signal strength, time '11:19', and battery level. Below the status bar is the Stollmann logo. In the center, there's a large circular button labeled 'Scan'. Below the button, the text 'No device connected' is displayed. At the bottom, there's a black bar with a white information icon (i).</p>
<p>Check if your BlueEva+S device (BM+S xxxx) is found and press the “Connect” button to establish the connection to the BlueEva+S.</p>	 <p>The screenshot shows the Stollmann app interface after a scan. The 'Scan' button is still present, but now there's a list of discovered devices below it. The list contains three entries: 'BM+SR 0', 'BM+S 001D', and 'BM+S 0202'. Each entry has a 'Connect' button next to it. The 'BM+S 001D' entry is highlighted with a red oval, and its 'Connect' button is also highlighted. At the bottom, there's a black bar with a white information icon (i).</p>


## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

The first connection attempt will last some seconds. If the connection attempt succeeded the device status is changed to “connected”.


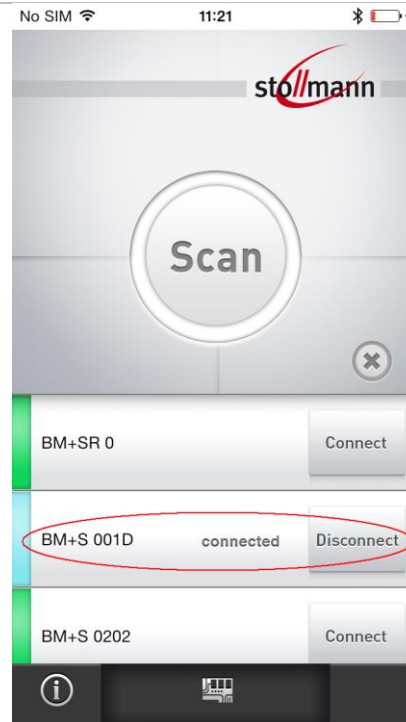


The BlueEva+S is sending a RING message followed by a CONNECT message at the serial port.

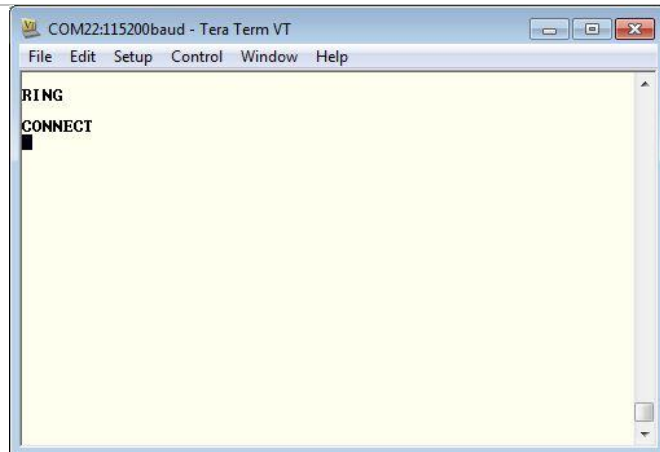

## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

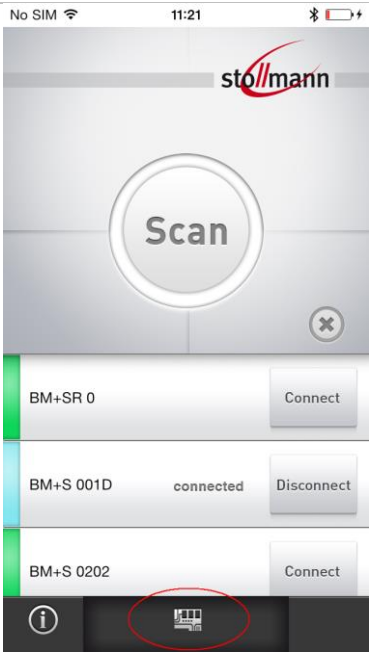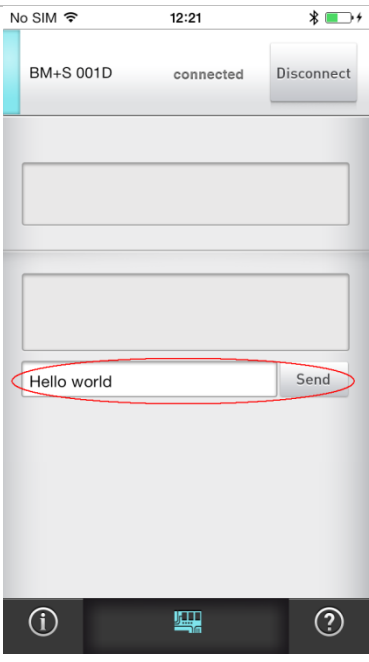
<p>For transmitting data to the BlueEva+S click on the icon at the bottom of the page.</p>	
<p>Enter data in the corresponding field and press the "Send" button.</p>	

## BlueEva+S Evaluation Kit User Guide


Stollmann is a Telit brand.

The BlueEva+S is receiving the sent data.

To send data from the BlueEva+S to the iPhone just enter the data in the terminal emulation program (data are not echoed in the example).

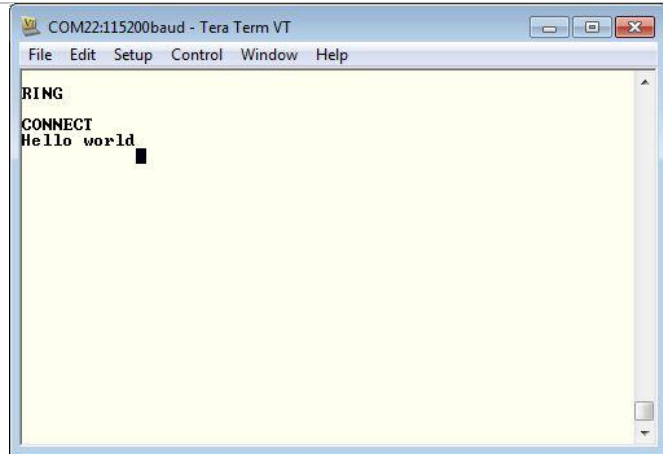


The “Terminal IO Utility” app on the iPhone is receiving the data.

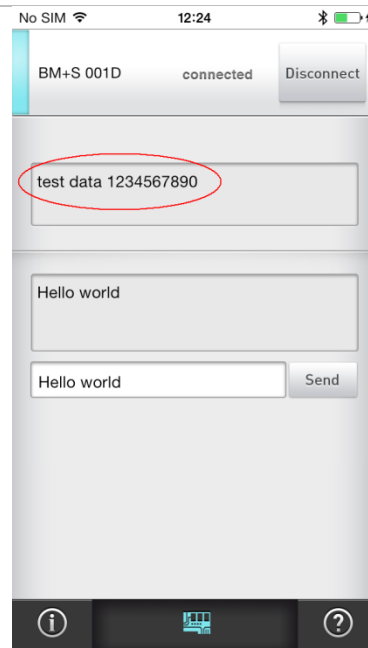


## BlueEva+S Evaluation Kit User Guide

Stollmann is a Telit brand.

To terminate the connection  
press the “Disconnect” button.

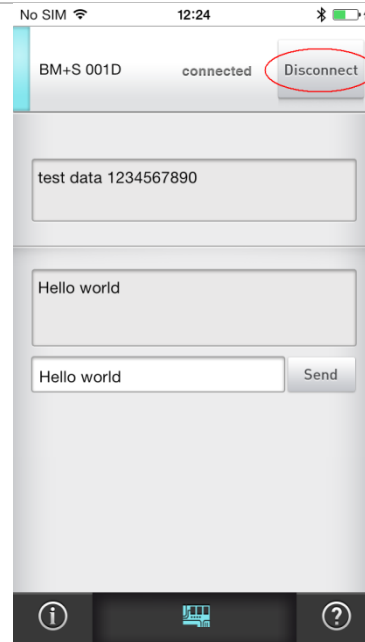

After the connection is  
terminated the BlueEva+S is  
sending a NO CARRIER  
message.

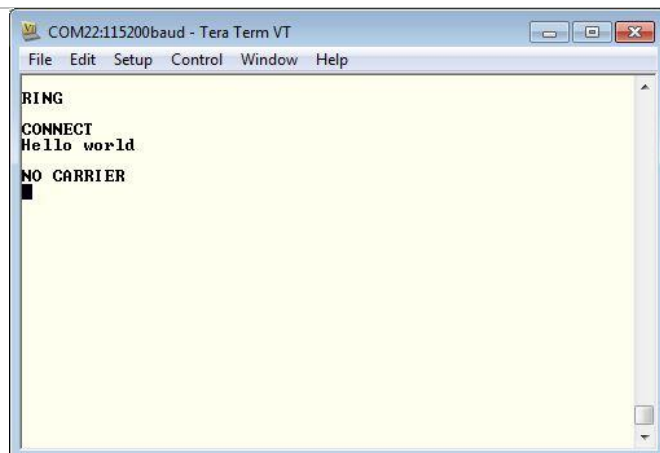

BlueEva+S  
Evaluation Kit User Guide


Stollmann is a Telit brand.

## 7 Firmware Update


The firmware of the BlueEva+S can be updated by using the BlueMod+S Updater. The file name of the executable program consists of version and patch information.

Please follow the instructions below for updating the firmware:

- Configure jumper J2 to position 2-3 to activate the bootloader at start-up.
- Connect the BlueEva+S to the USB port of a PC (make sure the FTDI VCP USB to UART driver is already installed). If the BlueEva+S is already connected to the PC perform a reset using the reset button.
- Start the *BM+S\_v1\_xxx\_FWupdate.exe* program.

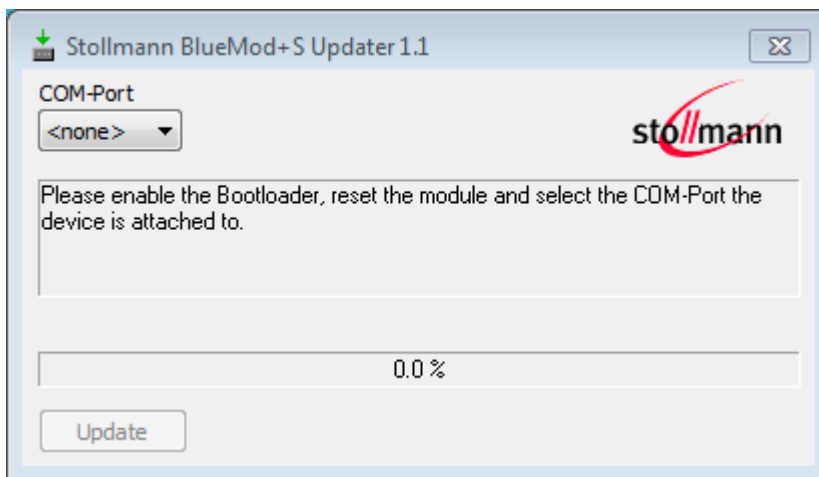

- Select the COM port the BlueEva+S is connected to and press the “Update” button.

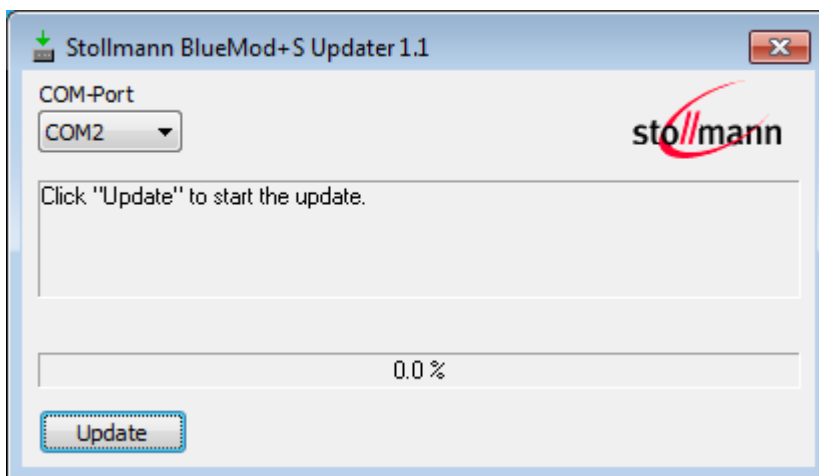






BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.


BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

- The firmware will be uploaded.

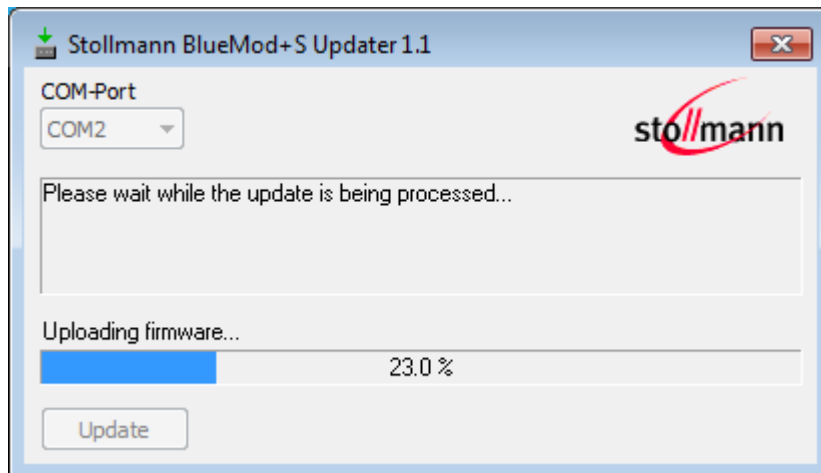

- After the update is completed click the “Finish” button.

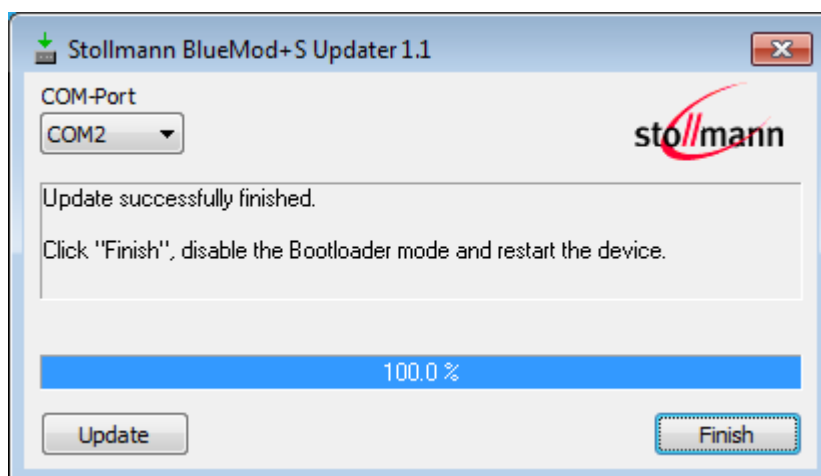

- To set back the BlueEva+S into normal operation mode, move jumper J2 to position 1-2 again and perform a reset.
- Send the AT&F command to set the factory default values.

*Note:*

*Do not disconnect the device while the update is in progress, otherwise the update will fail and has to be repeated. In case it is not possible to update the module please contact the Telit support (e-mail: [ts-srd@telit.com](mailto:ts-srd@telit.com)).*



BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

## 8 History

Version	Release Date	By	Change description
r01	02.04.2014	TA	Initial version
r02	11.09.2014	TA	Added chapter Firmware Update Revised description of Current Measurement
r03	17.04.2015	GJ	Adapted to V2.0
r04	24.05.2016	BG	Telit cover page added.



BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.



BlueEva+S  
Evaluation Kit User Guide

Stollmann is a Telit brand.

22761 Hamburg  
Germany

E-mail: [ts-srd@telit.com](mailto:ts-srd@telit.com)  
[www.telit.com](http://www.telit.com)



# SUPPORT INQUIRIES

Link to **[www.telit.com](http://www.telit.com)** and contact our technical support team for any questions related to technical issues.

**[www.telit.com](http://www.telit.com)**



Telit Communications S.p.A.  
Via Stazione di Prosecco, 5/B  
I-34010 Sgonico (Trieste), Italy

Telit IoT Platforms LLC  
5300 Broken Sound Blvd, Suite 150  
Boca Raton, FL 33487, USA

Telit Wireless Solutions Inc.  
3131 RDU Center Drive, Suite 135  
Morrisville, NC 27560, USA

Telit Wireless Solutions Co., Ltd.  
8th Fl., Shinyoung Securities Bld.  
6, Gukjegeumyung-ro8-gil, Yeongdeungpo-gu  
Seoul, 150-884, Korea

Telit Wireless Solutions Ltd.  
10 Habarzel St.  
Tel Aviv 69710, Israel

Telit Wireless Solutions  
Tecnologia e Servicos Ltda  
Avenida Paulista, 1776, Room 10.C  
01310-921 São Paulo, Brazil

Telit reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by Telit at any time. For most recent documents, please visit [www.telit.com](http://www.telit.com)

Copyright © 2016, Telit